arXiv:quant-ph/0307097v1 14 Jul 2003

New scheme for generating GHZ like state of n photons

Yoav Sagi
Department of Physics, Technion - Israel Inst. of Tech., Haifa 32000, Israel

In this paper we propose a new scheme for creating a three photons GHZ state using only linear optics elements and single photon detectors. We furthermore generalize the scheme for producing any GHZ-like state of n photons. The input state of the scheme consists of a non-entangled state of n photons. Experimental aspects regarding the implementation of the scheme are presented. Finally, the role of such schemes in quantum information processing with photons is discussed.

PACS numbers: 03.65.Ud, 42.50.Dv, 03.67.-a, 85.40.Hp

In recent years considerable attention has been drawn to the role played by entanglement in quantum physics. In particular, entanglement was found to contradict local realism [1, 2], which lies at the heart of classical mechanics. Moreover, as the number of particles participating in the entangled state gets larger, this violation of local realism becomes even stronger [3, 4]. Entanglement was also found to be the key ingredient in many quantum information processing applications, such as dense coding [5], teleportation [6] and cryptography [7]. In this field, one of the main questions is what is the most suitable physical implementation of quantum information processing systems. Among several possibilities, photons and linear optics offer the advantages of slow decoherence processes and ease of creation and manipulation in experiments. Nevertheless, they also pose the problem of very inefficient multi-photons interactions. For example, it was proved by Calsamiglia and Lutkenhaus [8] that using only linear optics, it is impossible to implement a perfect Bell state analyzer, which also means that it is impossible to create an entangled state from a non entangled state using only linear optical elements. This non-interacting nature is problematic in the implementation of quantum computation, because a deterministic c-not gate composed of solely linear optical elements cannot exist. One way to overcome this problem is by letting go of the requirement for a deterministic gate [9]. A different approach was suggested in Ref. [10]. In their paper, the authors propose a different model for quantum computation, in which the input state is a special entangled state called "cluster state", and all subsequent computational operations are carried out using only measurements. The usefulness of their new computational model to an optical implementation using photons as qubits depends on the ability to create an initial entangled state. Nevertheless, the benefit of this new computational model is that once the initial state is created we do not need to use 2-qubits operations, and we may exploit this advantage together with the idea of post-selection, as will be explained later.

In this letter we present a new scheme to create a GHZ-like (Greenberger-Horne-Zeilinger) state of n photons

$$|\psi\rangle = \frac{1}{\sqrt{2}}\Big(|0^o\rangle_{B1} |0^o\rangle_{B2} \cdots |0^o\rangle_{Bn} + |90^o\rangle_{B1} |90^o\rangle_{B2} \cdots |90^o\rangle_{Bn} \Big) \quad , \qquad (1)$$

using only linear optical elements and single photon detectors. For $n = 3$ this state enables us to violate local realism in a single measurement [3]. The first experimental observation of a GHZ state of 3 photons was reported in Ref. [11]. In this experiment, two entangled photon pairs were used to create a GHZ state. Due to the very small probability of simultaneous double pair creation in the non-linear crystal they used in the experiment, the count rates were of the order of $6 \cdot 10^{-3}$ counts per second. One of the novel ideas in the scheme presented here is that the input state is not entangled. This enables us to suggest a way to implement its creation in a much more efficient way, and thus the GHZ state rate of creation is significantly larger. Another advantage of the new scheme, as will be explained later in detail, is its ability to be generalized to n-photons GHZ-like state. We would also like to note the work of Zou *et al* [12] who proposed a scheme for the creation of a W-state. In their suggestion they also use linear optical elements, single photon detectors and an input state which consists of two single photons and one entangled pair. Also should be noted the work of Fiurášek [13], who proposed a scheme for a probabilistic creation of the entangled state of two optical modes $|\psi\rangle = 1/\sqrt{2}(|N;0\rangle + |0;N\rangle)$, where $|M;K\rangle$ denotes M photons in the first mode and K photons in the second mode.

Before going into the details of the new scheme, we would like to go back to a well known method of creation of the Bell state

$$\left|\psi^-\right\rangle = \frac{1}{\sqrt{2}}\Big(|0^o\rangle_A |90^o\rangle_B - |90^o\rangle_A |0^o\rangle_B \Big) \quad , \qquad (2)$$

where $|0^o\rangle_A$ denotes one photon with polarization oriented at 0^o degrees at mode A [14, 15]. This setup of two photons will be an important segment in the new scheme. The setup is given in figure 1. The input state of the scheme is the non-entangled state $|0^o\rangle_A |90^o\rangle_B$.

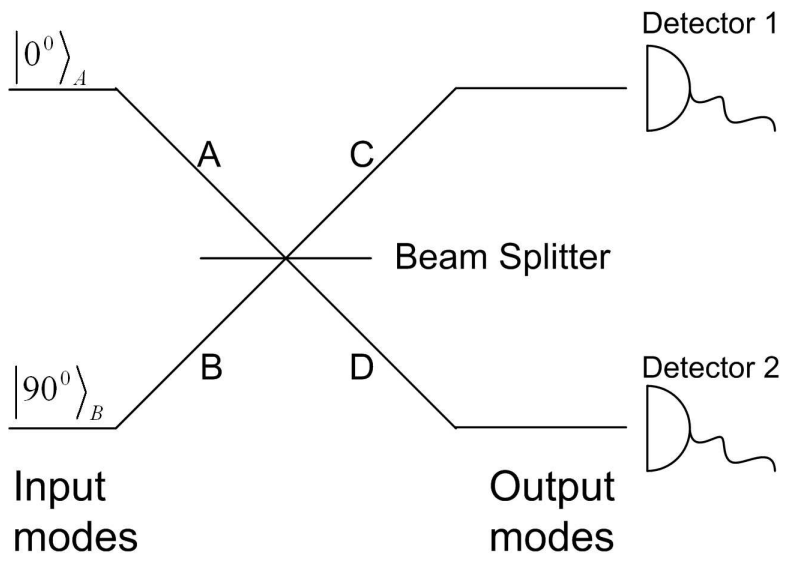

FIG. 1: Scheme for creating $|\psi^-\rangle$ using post-selection.

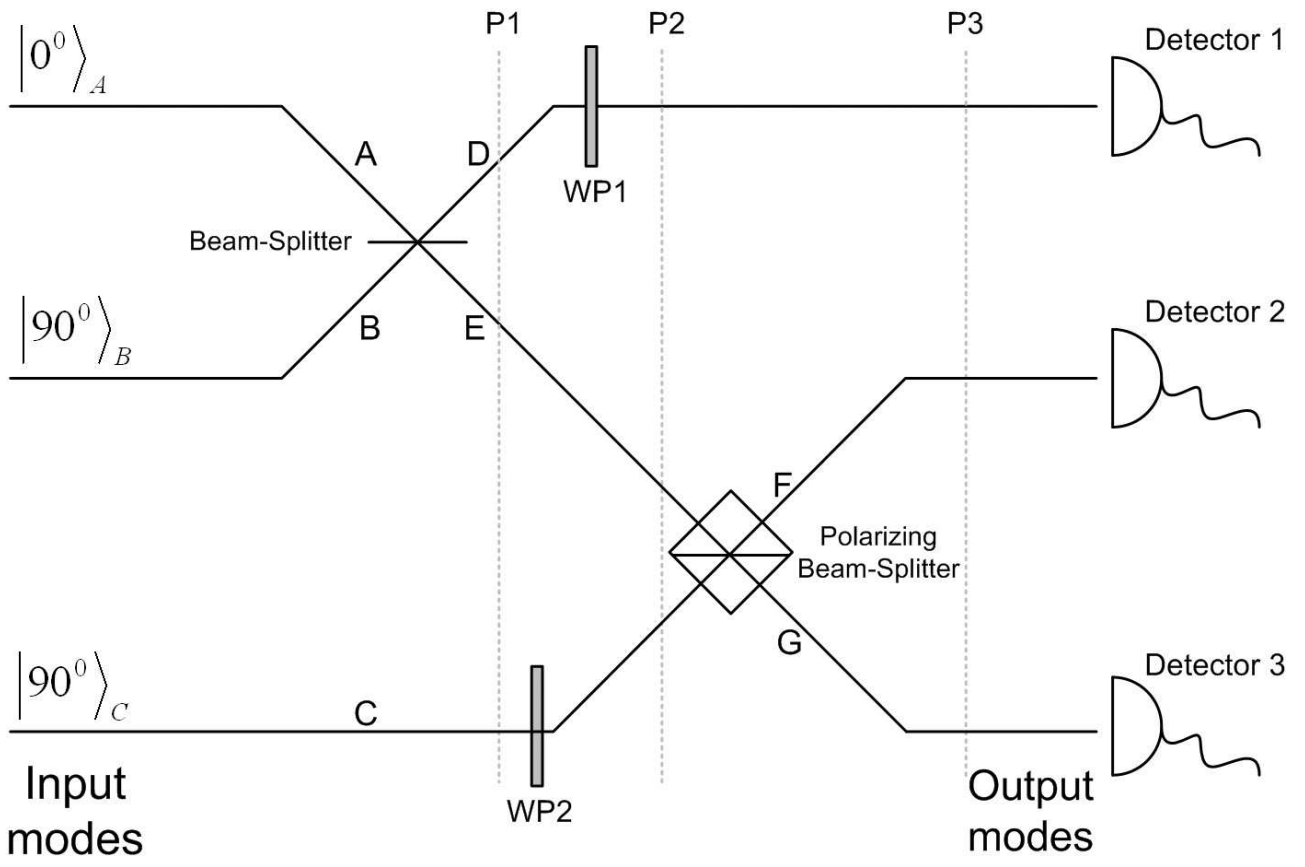

FIG. 2: Scheme for creating a GHZ state.

After the beam-splitter the output state is

$$
\begin{aligned}
|\psi\rangle_{output} &= \frac{1}{2}(|0^o\rangle_C + |0^o\rangle_D) \otimes (|90^o\rangle_C - |90^o\rangle_D) \\
&= \frac{1}{2}(|0^o\rangle_D |90^o\rangle_C - |90^o\rangle_D |0^o\rangle_C) + \\
&\quad \frac{1}{2}(|90^o\rangle_C |0^o\rangle_C - |90^o\rangle_D |0^o\rangle_D) \quad . \qquad (3)
\end{aligned}
$$

When doing the experiment, half the times the two detectors fire at once, and half the times only one of them fires. If we restrict ourselves to the ensemble of experiments in which the two detectors fired together, we post-select from the state given in Eq.(3) the Bell state $|\psi^-\rangle$. If one now introduces polarizers in front of the two detectors, one can carry out a Bell-inequality experiment which will prove the quantum nature of the state [14].

We shall now turn to describe the scheme for creating a 3-photon GHZ state. A graphic presentation of it is given in figure 2. The input state is

$$
|\psi\rangle_{input} = |0^o\rangle_A |90^o\rangle_B |90^o\rangle_C \quad . \qquad (4)
$$

The first optical element is a beam-splitter which mixes modes A and B in the same way as was described before. The state at plane $P1$ is given by

$$
\begin{aligned}
|\psi\rangle_{P1} &= \frac{1}{2}\Big((|0^o\rangle_E |90^o\rangle_D - |90^o\rangle_E |0^o\rangle_D) \otimes |90^o\rangle_C + \\
&\quad (|0^o\rangle_D |90^o\rangle_D - |0^o\rangle_E |90^o\rangle_E) \otimes |90^o\rangle_C\Big) \ .(5)
\end{aligned}
$$

Between plane $P1$ and $P2$ there are two $\lambda/2$ waveplates. $WP1$ is placed such that it retardation axis is rotated at 45^o relative to polarization axis 90^o. Thus, the effect of this waveplate is to transform $|90^o\rangle_D \to |0^o\rangle_D$ and $|0^o\rangle_D \to -|90^o\rangle_D$. $WP2$ is placed such that its retardation axis is rotated at 22.5^o relative to polarization axis 90^o, thus transforming the photon at mode C $|90^o\rangle_C \to 1/\sqrt{2}(|0^o\rangle_C + |90^o\rangle_C)$. The state at plane $P2$ is given by

$$
\begin{aligned}
|\psi\rangle_{P2} &= \frac{1}{2\sqrt{2}}\Big((|90^o\rangle_D |90^o\rangle_E + |0^o\rangle_D |0^o\rangle_E) \otimes \\
&\quad (|0^o\rangle_C + |90^o\rangle_C) - \\
&\quad (|0^o\rangle_E |90^o\rangle_E + |0^o\rangle_D |90^o\rangle_D) \otimes \\
&\quad (|0^o\rangle_C + |90^o\rangle_C)\Big) \quad . \qquad (6)
\end{aligned}
$$

The last optical element is a polarizing beam splitter, which we shall assume lets $|0^o\rangle$ photons pass and reflects $|90^o\rangle$ photons. Thus, the state at plane $P3$ is given by

$$
\begin{aligned}
|\psi\rangle_{P3} &= \frac{1}{2\sqrt{2}}\Big((|90^o\rangle_D |90^o\rangle_F + |0^o\rangle_D |0^o\rangle_G) \otimes \\
&\quad (|0^o\rangle_F + |90^o\rangle_G) - \\
&\quad (|0^o\rangle_G |90^o\rangle_F + |0^o\rangle_D |90^o\rangle_D) \otimes \\
&\quad (|0^o\rangle_F + |90^o\rangle_G)\Big) \quad . \qquad (7)
\end{aligned}
$$

Now let us restrict ourselves to the cases where there is a single photon in each of the modes D,F and G. It is easy to verify that the ensemble of experiments in which this condition is fulfilled corresponds to projection on the state

$$
|\psi\rangle_{PS} = \frac{1}{2\sqrt{2}}(|90^o\rangle_D |90^o\rangle_F |90^o\rangle_G + |0^o\rangle_D |0^o\rangle_F |0^o\rangle_G) \ , \qquad (8)
$$

where the subscript PS stands for *Post-Selected*. This state is the well known GHZ state. It is not normalized due to the fact the we obtain the wanted state only 1/4th of the times we carry out the experiment. Experimentally, the post-selected subspace corresponds to the case where all three detectors fire at once. The projection to this subspace can be achieved using electronic coincidence logic for the three detectors.

There are some important points to stress regarding the scheme just presented. First, the photons must arrive at the beam-splitter and the polarizing beam-splitter simultaneously in order to interfere. This implies that the optical paths of the photons from their point of creation to the beam-splitters must be accurate to within

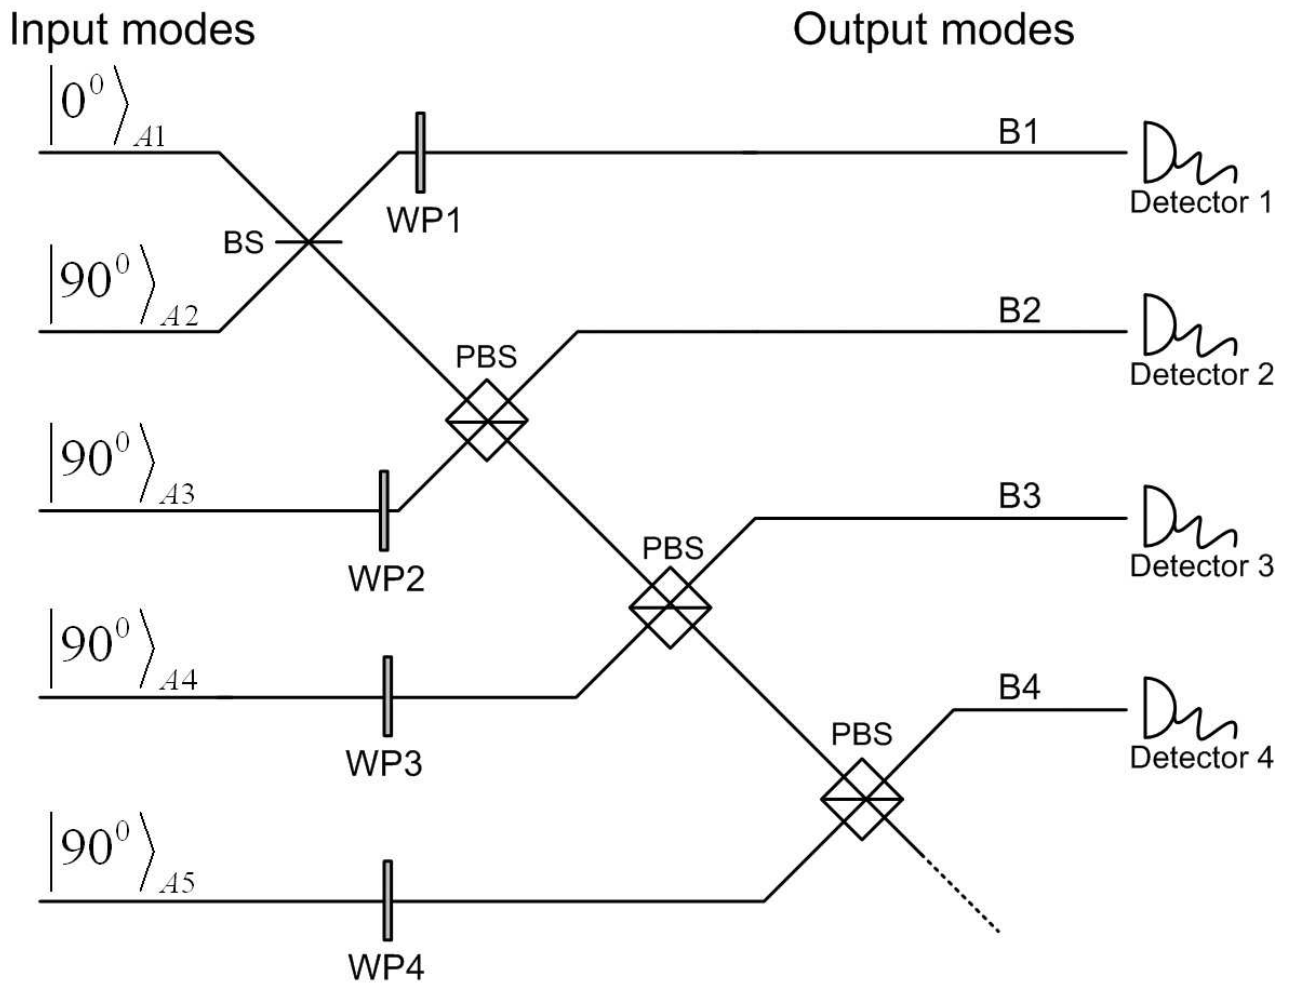

FIG. 3: Generalized n-photons GHZ state creation scheme.

the coherence length of the photons. Second, if we take care to use detectors which are not sensitive to the polarization of the photons, the knowledge that the three detectors fired at once does not reveal any information regarding the state of polarization of the photons, thus preserving the coherence between the two parts of GHZ wave-function. In that sense, the post-selected state is not a mixed-state, and may be used in tasks where no further mode-mixing is needed (e.i. GHZ measurement of violation of local realism). Third, in previous schemes [11, 12] the input state always involved some initial entanglement, i.e. entangled pairs of photons in a bell state $|\psi^-\rangle$. In the new scheme presented here there is no initial entanglement in the input state. This fact simplifies considerably the creation of the input state, and no special setup for creating entangled photons pairs is needed [16, 17].

The scheme can be generalized for creating an n photons GHZ state as defined by

$$\begin{aligned}|\psi\rangle \;=\; & \frac{1}{\sqrt{2}}\Big(|0^o\rangle_{B1}\,|0^o\rangle_{B2}\cdots|0^o\rangle_{Bn} + \\ & |90^o\rangle_{B1}\,|90^o\rangle_{B2}\cdots|90^o\rangle_{Bn}\Big)\quad , \qquad (9)\end{aligned}$$

where $B1..Bn$ are the output modes. The generalized scheme is depicted in figure 3. The input state of the generalized scheme consists of n-photons in the non-entangled state

$$|\psi\rangle_{input} = |0^0\rangle_{A1}\,|90^0\rangle_{A2}\,|90^0\rangle_{A3}\cdots|90^0\rangle_{An} \quad . \qquad (10)$$

The first two photons are being mixed on a beam-splitter to create a post-selected $|\psi^-\rangle$ state. Waveplate $WP1$ is used to flip the polarization of the photon in mode $B1$, just as explained in the GHZ scheme. $WP2$-WPN are $\lambda/2$ waveplates at 22.5^o. Thus there is a probabilistic duplication of the polarization state of one of the photons of the $|\psi^-\rangle$ state to the photons at modes $B3$ to BN using the input photons of the modes $A3...An$ and the polarizing beam-splitters. The probability for the two photons coming from $A1$ and $A2$ to be in a $|\psi^-\rangle$ state is 1/2. The probability of the success of the duplication process is 1/2 for each polarizing beam-splitter. Therefore, the success probability of this scheme is $1/2^{n-1}$.

The input state can be created using single photon sources. Nevertheless, the complete technology of these sources is yet to be established [18, 19]. Naively, one could suggest the usage of faint continuous lasers as source for the input state. This cannot be done because of the poissonian distribution of the laser. To understand why, let us take as an example two faint sources with poissonian distribution and equal intensity, entering a beam-splitter from two different directions. The probability for detecting n photons in a given period of time ΔT in each of the modes is given by [20]

$$p(n) = \frac{W^n e^{-W}}{n!} \quad , \qquad (11)$$

where W is a function of the intensity of the lasers, and the period ΔT. The event which interest us is when two distinct photons, each of which is coming from a different source, interfere at the beam-splitter. The probability for this event to happen is $p(1)^2$. Nevertheless, there is another undesirable event in which two photons from one of the sources come at the same time to the beam-splitter, with probability $2 \cdot p(2)$. This event may cause two detectors placed at the two output modes of the beam-splitter to record a fire, even though no entanglement is present in the state. For sources with poissonian distribution the ratio of the undesired events to the desired ones is e^W, and is always greater than 1 (where 1 is the limit for sources with intensity that goes to zero). This means that for poissonian sources there will be always more "bad" events then "good" ones, therefore making them not useful to our purpose. Instead, in figure 4 we give a possible way for creating the input state for the 3-photons GHZ scheme. A fs laser pulse with frequency ω_p undergoes spontaneous degenerate type II parametric down-conversion (SPDC) in two non-linear crystals. Thus, two pairs of orthogonally polarized photons at frequencies $\omega_p/2$ are created. The necessity of the fs laser pulse is due to the fact that the coherence time of the photons created in a SPDC process depends on the collection angle or on the interference filter width, and is of the order of a few hundred femto-seconds. Therefore, if the creation time difference between the two photon pairs is not within the coherence time, they will arrive at the beam-splitters at different times and will not interfere. A fs laser pulse solves this problem because it enables us to determine the time of creation to an accuracy of about $100fs$. The statistical distribution of pair creation in SPDC is poissonian. This means that the probability of two pair creation in one of the crystals is larger than

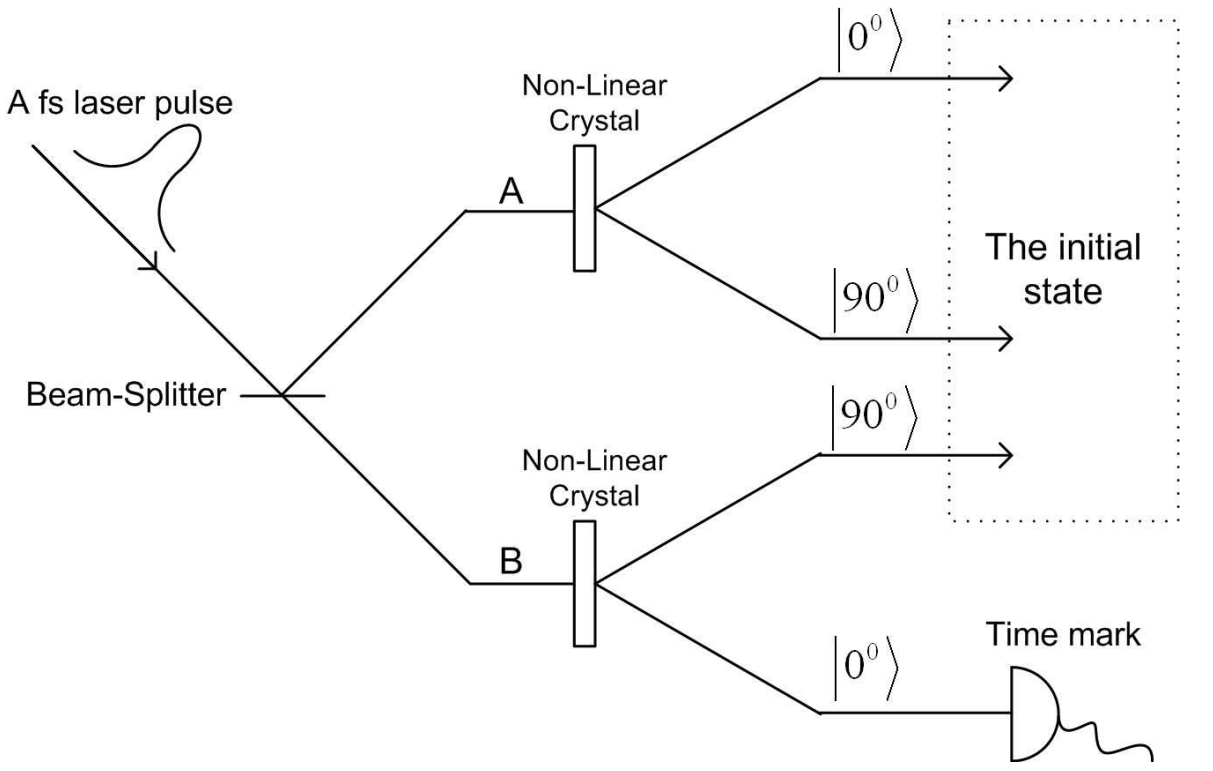

FIG. 4: Input state creation for the 3-photon GHZ scheme.

the probability of one pair creation in each of them. To solve this problem we use the fourth photon as a sign that a pair was created in the non-linear crystal B. Under the condition that the fourth photon is recorded, the undesired events are the creation of two pairs in crystal A and of a second pair in crystal B, in addition to a single pair that was created in crystal A (we neglect undesired events of higher order such as three pairs creation). The ratio of undesired events to desired ones equals W, where W characterizes the poissonian distribution of pair creation. This result, in contrast to pure poissonian sources, shows that by choosing a small enough W we obtain neglected erroneous counts. Let us give a numerical example. Choosing $W = 10^{-2}$ implies a purity of 99% in the state creation. The probability for two pair creation in the two crystals is 10^{-4}, therefore if we use a conventional Ti:Sapphir laser which operates at a rate of $80\,MHz$ we obtain approximately 8000 double photon pairs per second. Since only 1/4 of the times the scheme succeeds, we should expect around 2000 GHZ states per second. This rate is five orders of magnitude higher then the rate obtained in the experiment reported in Ref. [11]. Nevertheless, the technique described here is only useful for small numbers of photons, because the probability for the simultaneous creation of N pairs is $(We^{-W})^N$ which is exponentially decreasing with N. For larger N it is necessary to use a true single photon source which can be triggered synchronically [18, 19].

In conclusion, in this letter we presented a new scheme for the probabilistic creation of a GHZ like state of n-photons using only elements of linear optics and single photons detectors. We also described the input state creation technique which makes use of non-linear crystals and a fs laser pulse. The new scheme can be useful in quantum information processing applications where initial entanglement is needed.

We gratefully acknowledge helpful discussions with Moshe Shuker, Amit Ben-Kish, Ofer Firstenberg, Amnon Fisher and Amiram Ron.

[1] A. Einstein, B. Podolsky, and N. Rosen, Phys. Rev. **47**, 777 (1935).
[2] J. S. Bell, Phys. **1**, 195 (1964).
[3] D. M. Greenberger, M. A. Horne, A. Shimony, and A. Zeilinger, American Journal of Physics **58**, 1131 (1990).
[4] D. Kaszlikowski, P. Gnaciński, M. Żukowski, W. Miklaszewski, and A. Zeilinger, Phys. Rev. Lett. **85**, 4418 (2000).
[5] C. H. Bennett and S. J. Wiesner, Phys. Rev. Lett. **69**, 2881 (1992).
[6] C. H. Bennett, G. Brassard, C. Crepeau, R. Jozsa, A. Peres, and W. K. Wootters, Phys. Rev. Lett. **70**, 1895 (1993).
[7] A. K. Ekert, Phys. Rev. Lett. **67**, 661 (1991).
[8] J. Calsamiglia and N. Lutkenhaus (2000), quant-ph/0007058.
[9] E. Knill, R. Laflamme, and G. J. Milburn, Nature (London) **409**, 46 (2001).
[10] R. Raussendorf and H. Briegel (2000), quant-ph/0010033.
[11] D. Bouwmeester, J.-W. Pan, M. Daniell, H. Weinfurter, and A. Zeilinger, Phys. Rev. Lett. **82**, 1345 (1999).
[12] X. Zou, K. Pahlke, and W. Mathis, Phys. Rev. A **66**, 044302 (2002).
[13] J. Fiurášek, Phys. Rev. A **65**, 053818 (2002).
[14] Z. Y. Ou and L. Mandel, Phys. Rev. Lett. **61**, 50 (1988).
[15] S. Bose and D. Home, Phys. Rev. Lett. **88**, 050401 (2002).
[16] P. G. Kwiat, K. Mattle, H. Weinfurter, A. Zeilinger, A. V. Sergienko, and Y. Shih, Phys. Rev. Lett. **75**, 4337 (1995).
[17] P. G. Kwiat, E. Waks, A. G. White, I. Appelbaum, and P. H. Eberhard, Phys. Rev. A **60**, R773 (1999).
[18] C. Brunel, B. Lounis, P. Tamarat, and M. Orrit, Phys. Rev. Lett. **83**, 2722 (1999).
[19] C. Santori, M. Pelton, G. Solomon, Y. Dale, and Y. Yamamoto, Phys. Rev. Lett. **86**, 1502 (2001).
[20] L. Mandel and E. Wolf, *Optical Coherence and Quantum Optics* (Cambridge University Press, NY, United States of America, 1995), p. 727.